



Pump Model	SRB 51-24	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 225 - PN 64	1st Impeller	N/A
Max No. Stages	12 Stages	Delivery	DN 200 - PN 160	Impeller	51-23
Max Head	1344.1 m	Pumped Medium - Water @		Diffuser	51-21
Max Flowrate	600.0 m ³ /h	Temperature	20 °C	Last Diffuser	51-21
Max Efficiency	79.0%	Viscosity	1 cP	Overflow	51-22
Max Abs Power	176.7 kW Per Stage	Density	998 kg/m ³	Stage Casing	51-42

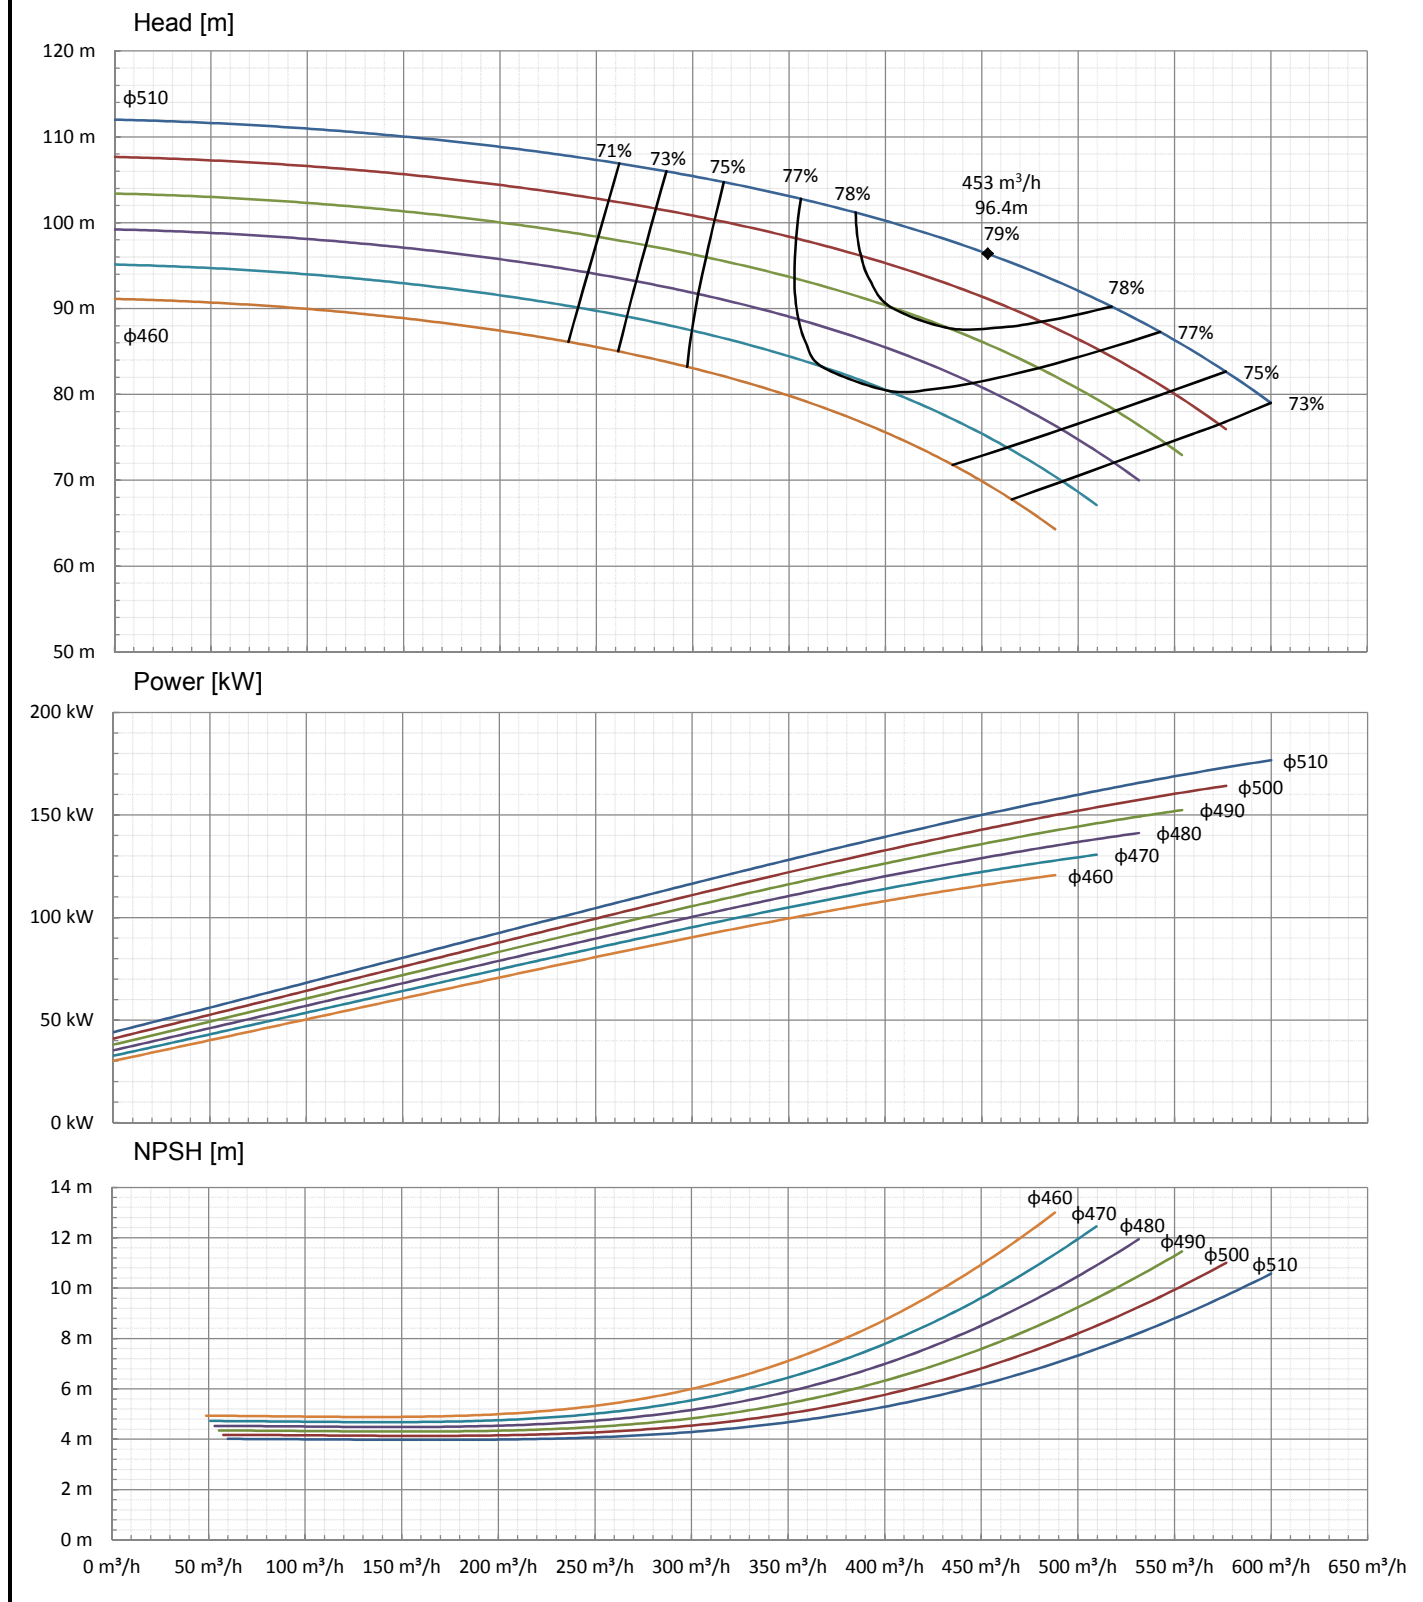

DOCUMENT NUMBER:	SCAG-R-205	ENGINEER:	Craig Adamson
REVISION:	2	PROJECT:	
DATE:	2015-08-24	CUSTOMER:	

Pump Model	SRB 51-24	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 225 - PN 64	1st Impeller	N/A
Max No. Stages	12 Stages	Delivery	DN 200 - PN 160	Impeller	51-23
Max Head	1344.1 m	Pumped Medium - Water @		Diffuser	51-21
Max Flowrate	600.0 m³/h	Temperature	20 °C	Last Diffuser	51-21
Max Efficiency	79.0%	Viscosity	1 cP	Overflow	51-22
Max Abs Power	176.7 kW Per Stage	Density	998 kg/m³	Stage Casing	51-42

Head [m] 2 - 12 Stages

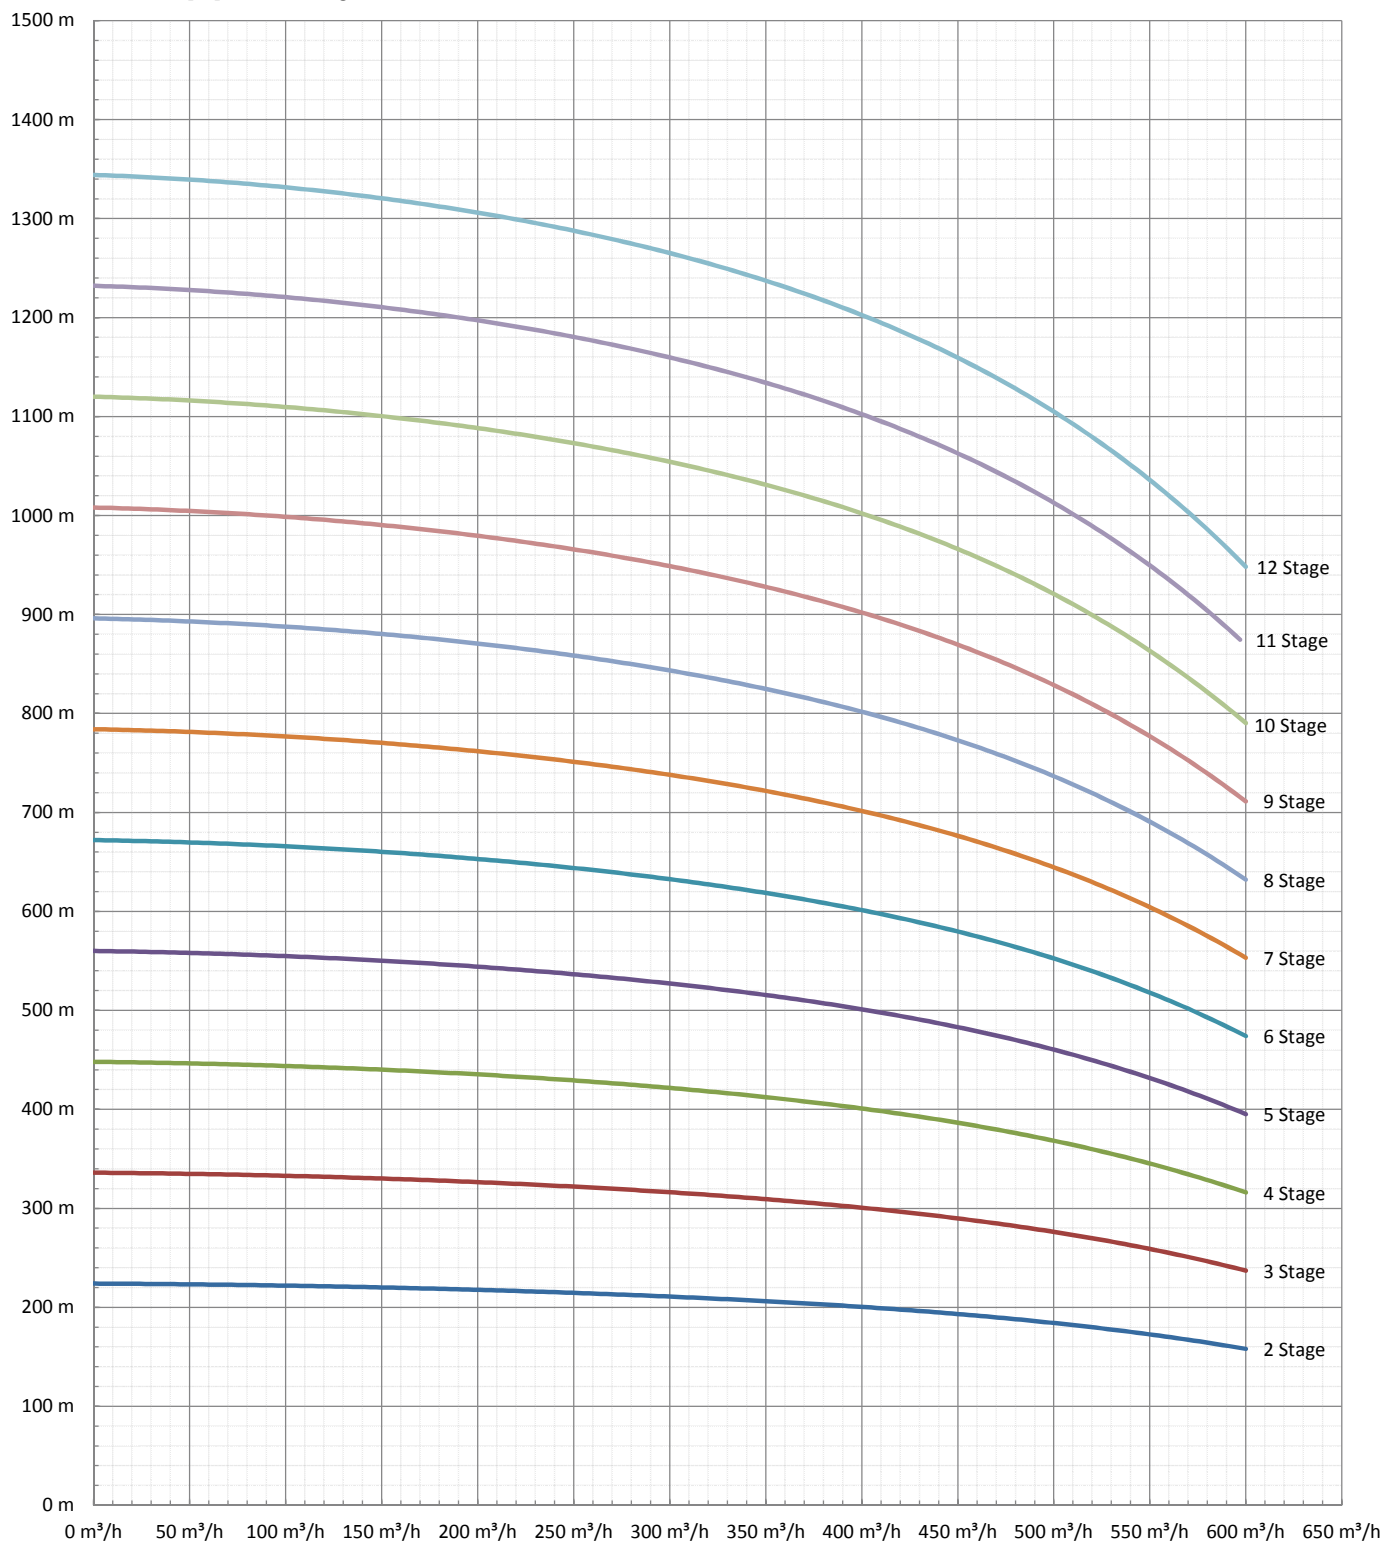

DOCUMENT NUMBER:	SCAG-R-205	ENGINEER:	Craig Adamson
REVISION:	2	PROJECT:	
DATE:	2015-08-24	CUSTOMER:	